

DC Range Air Blown Oil Coolers

Model - GDDC 15

Cooling at 100°C ΔT KW Radiator Pressure Rating

Noise level dBA x 1 MTR Radiator Ports Sizes

Max Oil Flow Rate LPM

M | kW | 12 V | 24 V | #

Fan

Power

Approx KG (dry)

15

7 Bar

¾" Bsp

150

0.10 7.70 3.90

Amps


Αt

Amps

Αt

(=--,)

4.0

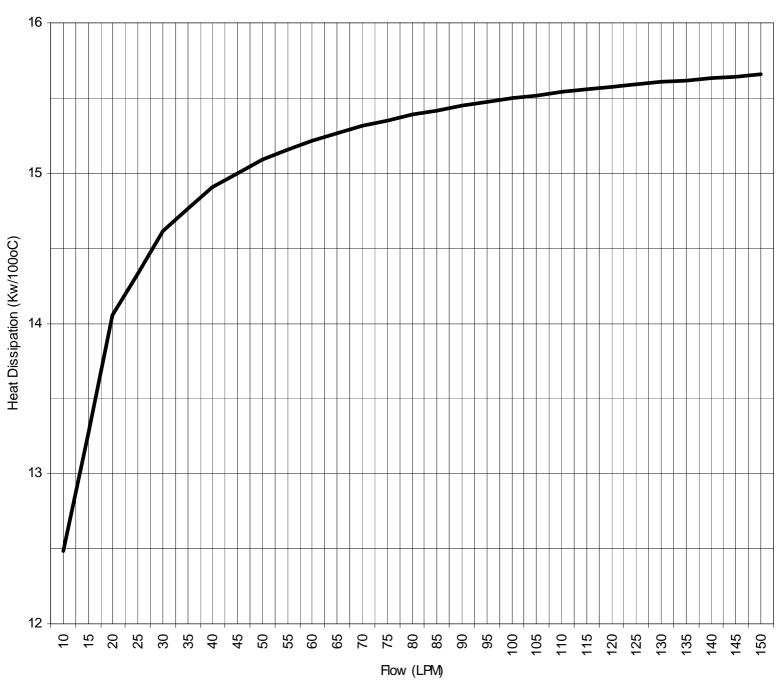




Boston Industrial Estate Power Station Road RUGELEY Staffordshire WS15 2HS Tel: +44 (0)1889 574880 Fax: +44 (0)1889 575074 Email: sales@gdmcoolers.co.uk


Website: www.gdmcoolers.co.uk



DC Range Air Blown Oil Coolers

Model - GDDC 15

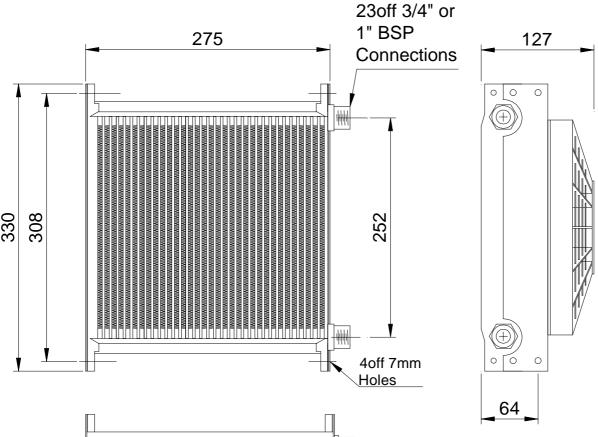



CAUTION - NOISE DATA

The noise values are given by the fan manufacturers in dBa and apply to 'free field' conditions. In practice different conditions lead to sound reflection reverberation and resonance, dependent on insulation details. The resulting actual noise levels can be in excess of the nominal figure shown.

Please note: Fan powers and amps are for guidance only:

Note:

All dimensions are in Millimetres and are for reference only and drawings should be obtained for installation purposes. Certified Dim, Drwgs, are available if required. Terotechnical information sheets are sent with each cooler, or earlier if requested. We reserve the right to

change details with out prior notice. NOTES ON AIR FLOW

Air flow direction is generally pushing (type "A") from fan, through radiator. Pulling (type "B") versions are available. If critical please consult GDM Cooler Manufacturing Ltd.

